



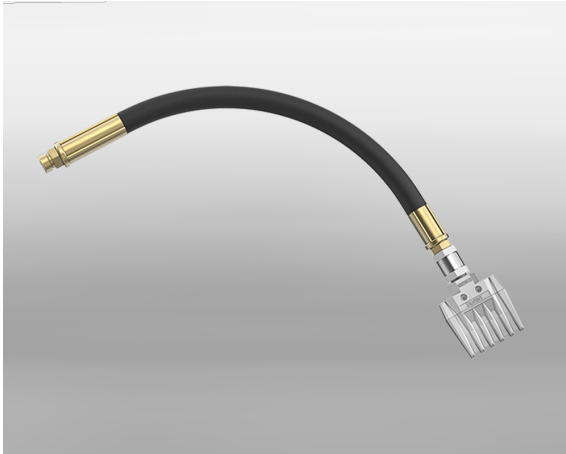

|                    |          |
|--------------------|----------|
| Replaces open tube | 6 mm     |
| Noise reduction    | 24 dB(A) |
| Air-/ cost savings | 39 Nm³/h |

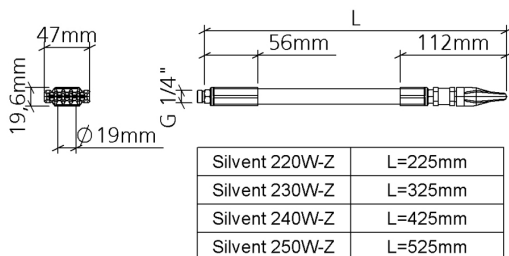

## Silvent 230 W-Z

Flexblow L= 300mm with nozzle SV 9002 W-Z | 5,5N - AG 1/4 Silvent 230 W-Z

Silvent 230 W-Z : The Silvent 9002W-Z nozzle mounted on a bendable FlexBlow hose. Keeps desired position even at high pressure. Available in 4 different standard lengths. Compressed air is optimally used in this flat nozzle, which through its unique design introduces a completely new blowing technology feature. The aerodynamic nozzle design achieves the effect by maximizing entrainment of air. Each orifice is also uniquely designed to optimize the entrainment area. These small orifices combined with the aerodynamic slots of the nozzle provide high efficiency.

## Technical data

|                         |          |
|-------------------------|----------|
| Item number             | 753134   |
| Weight                  | 280 g    |
| Air consumption         | 28 Nm³/h |
| Air connection          | 1/4 "    |
| Blowing Power           | 5,5 N    |
| Max. Operating pressure | 1,0 MPa  |
| Max temperature         | 70 °C    |
| Noise                   | 78 dB(A) |
| Material                | Zinc     |
| Air pattern             | Flat     |
| Connection              | 1/4 BSP  |